




# Dreamax DMX-ST7A Motherboard Replacement

Removing and replacing the tablets Motherboard.

Written By: Stacey Mattila

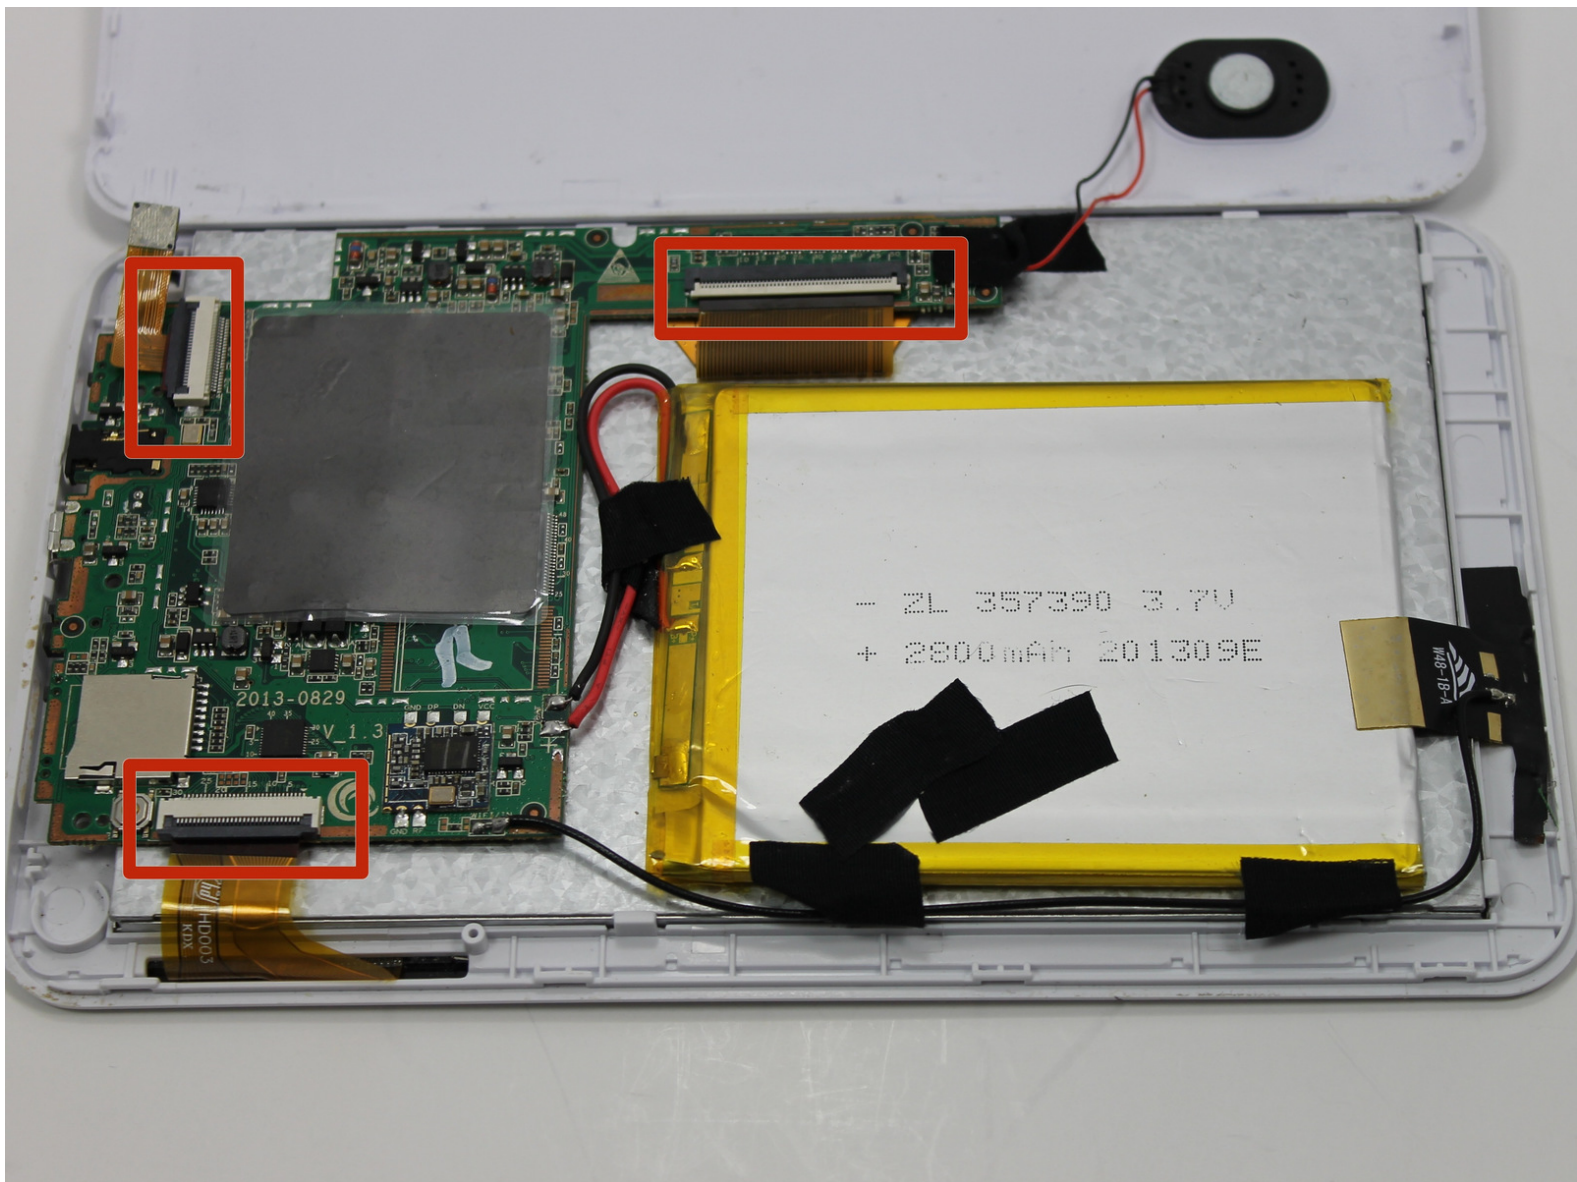

## INTRODUCTION

Replace the tablets Motherboard.

---

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Solder](#) (1)
  - [Portable Soldering Iron](#) (1)
-

## Step 1 — Back Cover



- Position the tablet so the ports and screws are facing you.

## Step 2



- Remove the two 2.5mm screws using the Phillips #00 precision screwdriver.



### Step 3





- Use the plastic opening tool to assist in removing the back cover.

### Step 4




- Upon removing the back cover position the tablet as seen in the picture.

## Step 5 — Motherboard

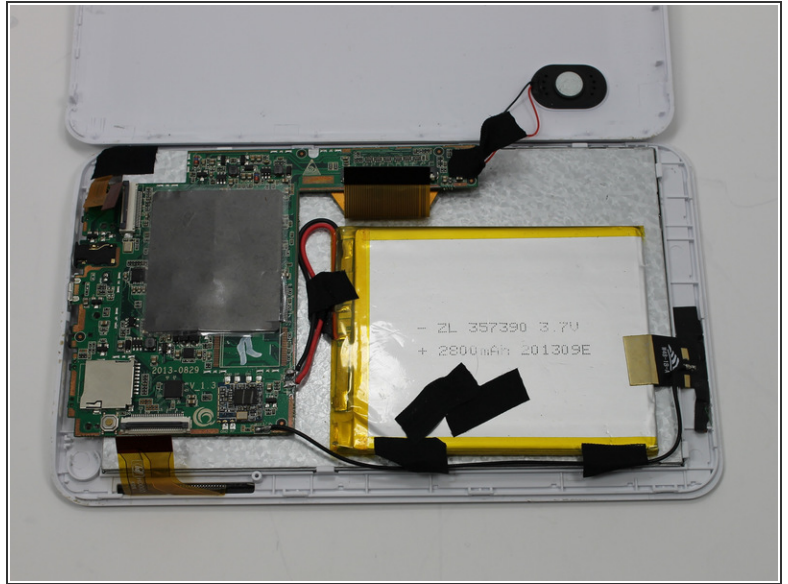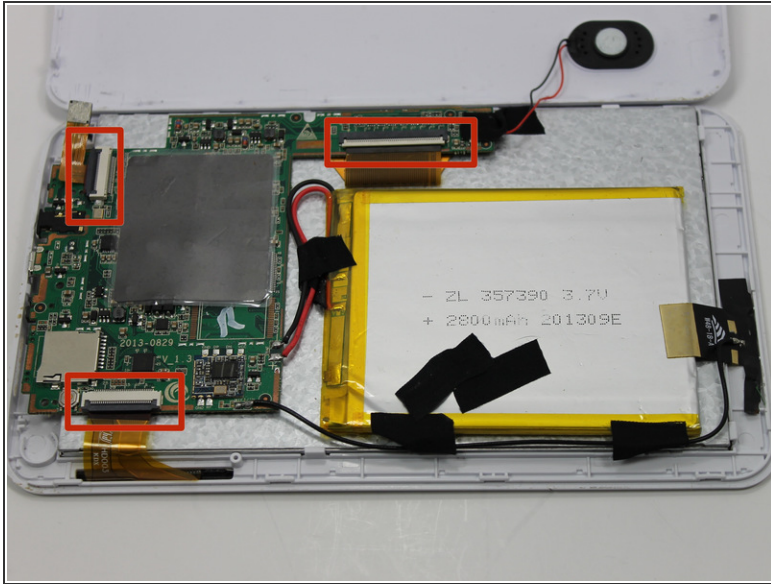

- Lift the black bars to expose the data strips.
- Remove the data strips.

## Step 6

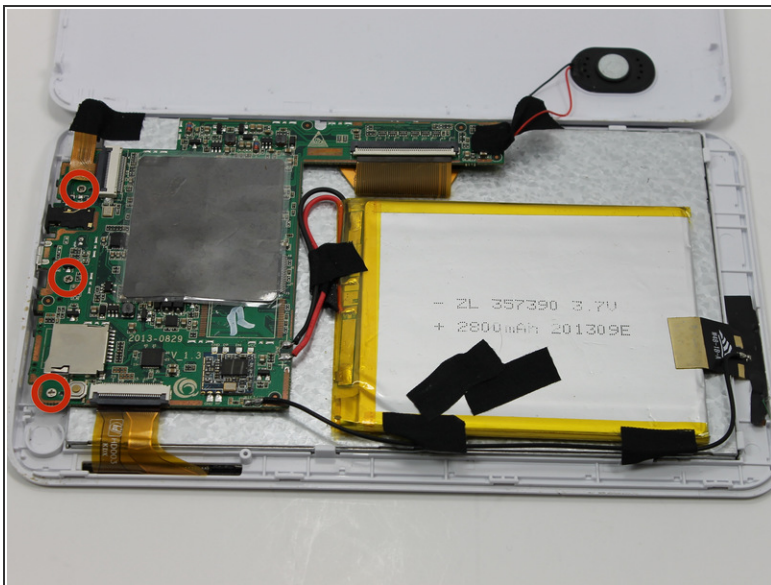

- Remove the three 2.5mm screws using the Phillips #00 precision screwdriver that is holding the motherboard in place.





## Step 7



- Remove the three wires connected to the battery along with the speaker wires from the motherboard. Then remove the motherboard from the tablet.

## Step 8

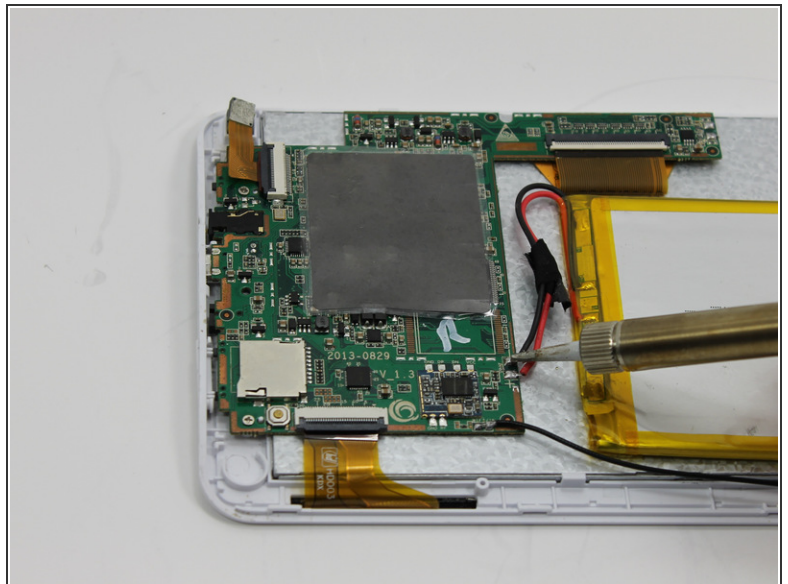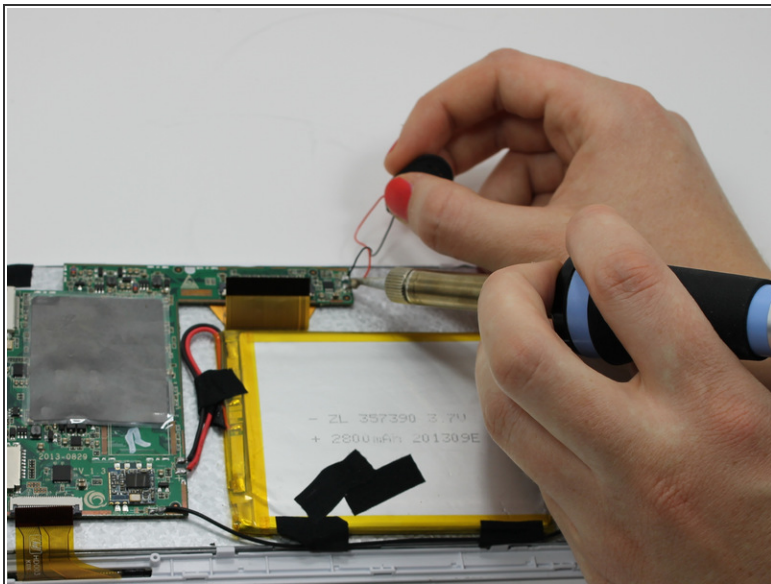

- Install the new motherboard by soldering the speaker wires and the battery wires in their intended location. For additional soldering instructions please view this page: [How To Solder and Desolder Connections](#)

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 05:09:12 AM.